


# Error handling

When error occurs, this error is delivered in appropriate event. For example, when connection error occurs, `ConnectionStatusEvent` is the event for this error, and `CallStatusEvent` is the event for SIP calls errors. Anyway, the event contains `status: "FAILED"` and error description in `info` field. If the error cannot be classified, it will be delivered to the client as `ErrorEvent` with error description in `info` field.



Also `ErrorEvent` will be delivered to the client in case of backend server interaction errors when `event method` is called

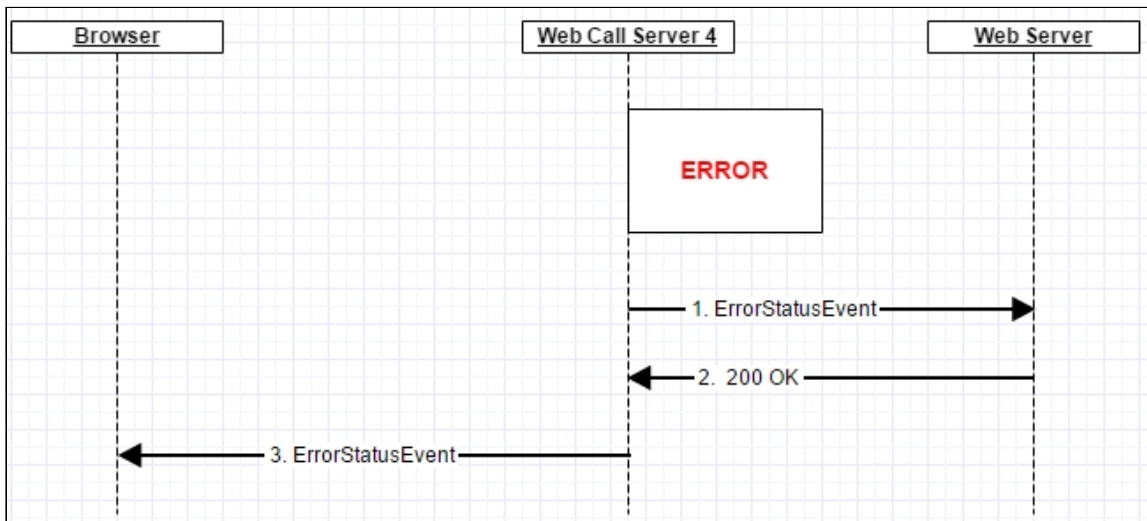