Publishing and playing stream via WebRTC over TCP

- Overview
 - Supported platforms and browsers
 - Operation flowchart
- Call flow
- Configuration
 - Adjusting send and receive buffersPorts used
- · Quick manual for testing
- Known issues

Overview

Usually, UDP is used on transport level to transfer WebRTC mediadata. On the one hand, this allows to reduce data transfer latency. On the other hand, high bitrate FullHD and 4K translations quality decreases even on relatively good channels due to packets loss.


If WebRTC translations quality is a must, WCS allows to use TCP on transport level according to RFC4571and6544.

Supported platforms and browsers

	Chrome	Firefox	Safari 11	Edge
Windows	+	+		+
Mac OS	+	+	+	
Android	+	+		
iOS	-	-	+	

Operation flowchart


Browser 1 - Publisher

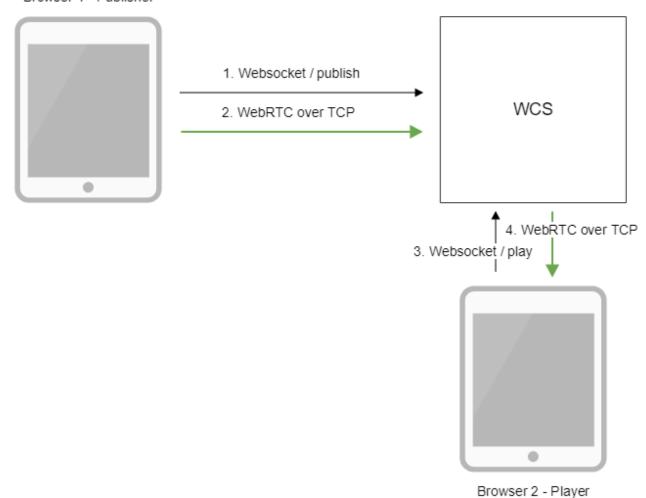

- The browser connects to the server via the Websocket protocol and sends the publish command.
 The browser captures the microphone and the camera and sends a WebRTC stream to the server over TCP.
 The second browser establishes a connection also via Websocket and sends the play command.
 The second browser receives the WebRTC stream over TCP and plays that stream on the page.

Call flow


WebRTC stream publishing over TCP, call flow differs from steam publishing via UDP:

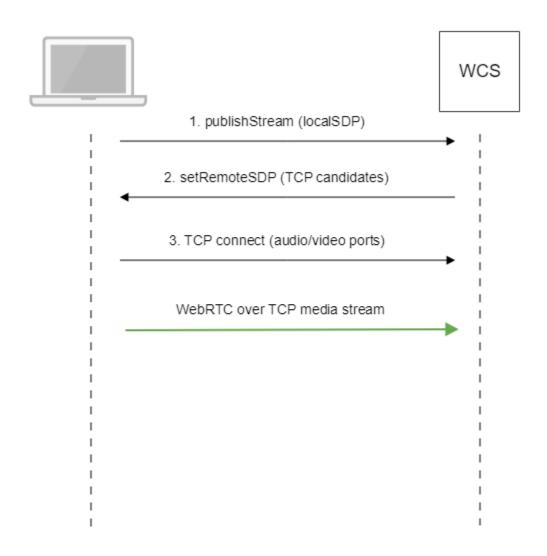

- 1. Client sends SDP offer to server via Websocket.
- 2. Client receives SDP with TCP ICE candidates from server:

```
v=0
o=Flashphoner 0 1545364895231 IN IP4 192.168.1.5
s=Flashphoner/1.0
c=IN IP4 192.168.1.5
t = 0 0
m=audio 31038 RTP/SAVPF 111 8 9
c=IN IP4 192.168.1.5
a=candidate:1 1 tcp 2130706431 192.168.1.5 31038 typ host tcptype passive
a=candidate:1 2 tcp 2130706431 192.168.1.5 31038 typ host tcptype passive
a=end-of-candidates
. . .
m=video 31040 RTP/SAVPF 100 127 102 125 96
c=IN IP4 192.168.1.5
a=candidate:1 1 tcp 2130706431 192.168.1.5 31040 typ host tcptype passive
a=candidate:1 2 tcp 2130706431 192.168.1.5 31040 typ host tcptype passive
a=end-of-candidates
a=rtcp-mux
a=rtcp:31040 IN IP4 192.168.1.5
a=sendonly
a=ssrc:564293803 cname:rtp/video/1b951110-04d5-11e9-a8b5-19c6b1a7cdbb
```

3. Client establishes TCP connection to audio and video data ports from SDP and starts to send mediadata.
Similarly, playback call flow goes as follows:

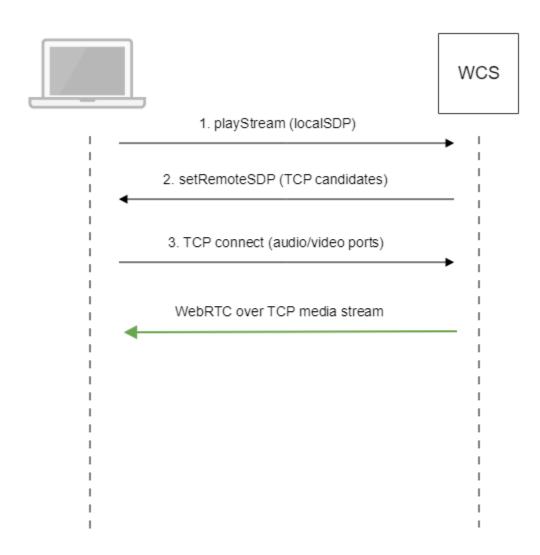

- 1. Client sends SDP offer to server via Websocket.
- 2. Client receives SDP with TCP ICE candidates from server.
- 3.Client establishes TCP connection to audio and video data ports from SDP and starts to receive mediadata.

Configuration

 $We bRTC \ over \ TCP \ usage \ is \ enabled \ with \ the \ following \ parameter \ in \ flash phoner. properties file$

ice_tcp_transport=true

Adjusting send and receive buffers

Send and receive buffers sizes are set with the following parameters:

ice_tcp_send_buffer_size=1048576
ice_tcp_receive_buffer_size=1048576

By default, buffers sizes are set to 1 M.

Ports used

TCP ports from WebRTC media ports data range are used for WebRTC connection over TCP


media_port_from =31001 media_port_to =32000

Quick manual for testing

- 1. For test we use:
 - WCS server
 - Two Way Streamingweb application to publish and play WebRTC stream in Chrome browser
- 2. Open Two Way Streaming web application, pressConnect, enter stream name test and pressPublish. Stream publishing will start.




3. To make sure stream goes to server open chrome://webrtc-internals

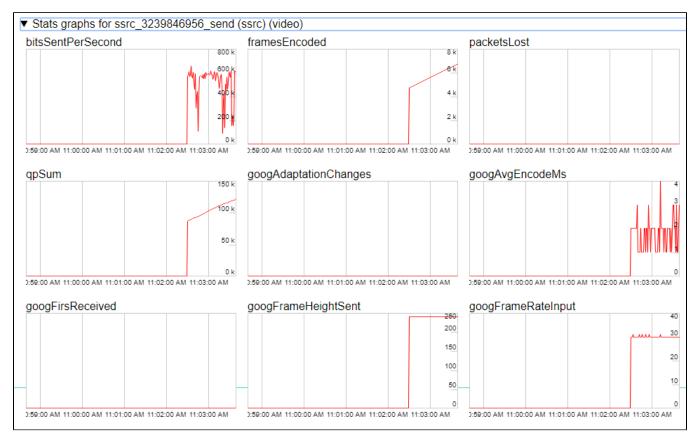

 ${\tt 4. \ In \ Player \ windows \ enter \ stream \ nametestand \ press{\tt Play}. \ Stream \ playback \ will \ start.}}$



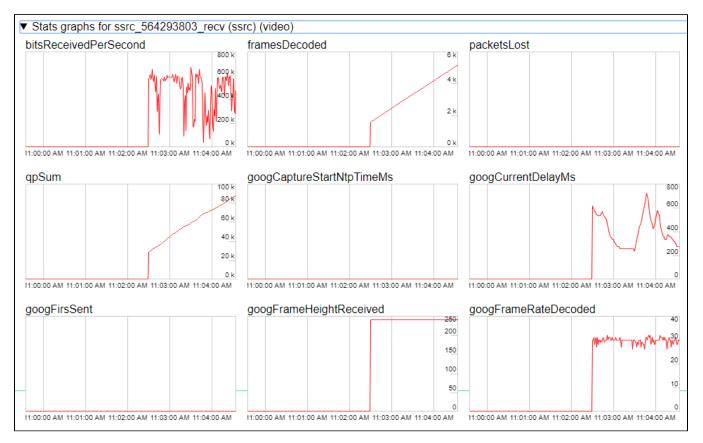

6. To make sure TCP connection is established, launch this command on server

netstat -np | grep ESTABLISHED

The following lines will be in command output

tcp	0	0	192.168.1.5:8443	192.168.1.100:60289	ESTABLISHED 7459/jav
# publi	shing s	tream	ı		
tcp	0	0	192.168.1.5:31030	192.168.1.100:60305	ESTABLISHED 7459/ja
tcp	0	0	192.168.1.5:31032	192.168.1.100:60307	ESTABLISHED 7459/ja
# playi	ng stre	am			
tcp	0	112	192.168.1.5:31038	192.168.1.100:60515	ESTABLISHED 7459/ja
tcp	0	817	192.168.1.5:31040	192.168.1.100:60517	ESTABLISHED 7459/jav

Where

- 192.168.1.5 is WCS server IP address
- 192.168.1.100 is client IP address

Known issues

1. Some browsers (MS Edge on Windows, Chrome on Ubuntu) do not establish WebRTC connection if additional network interfaces are enabled (VPN) Symptoms: WebRTC stream publishing and playback do not work over TCP

Solution: disable any additional network interfaces except this one used to access WSC server.